

4.2.1 ICSO 08 R1
8 relay outputs 2A


Binary Output remote unit

Binary output unit with 8 relay output channels 2 A.

Description of the unit front :

- Eight yellow output status led's «0» to «7»
- «TEST» push-button
- Red error led
- List of error codes

The unit has to be mounted on a plug-in base ECZ

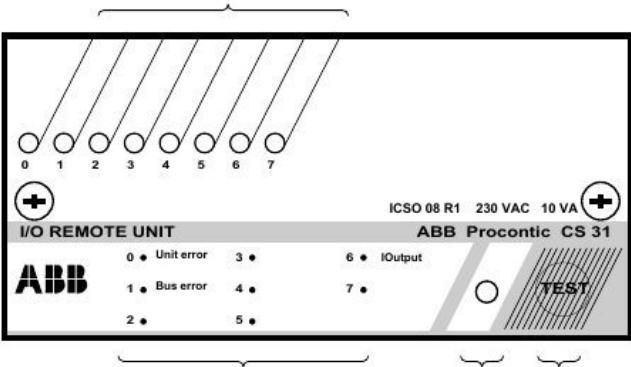

8 outputs per unit

TECHNICAL CHARACTERISTICS		
Power supply	24 VDC	230 VAC/120 VAC
Number of outputs per unit	8	8
Power supply isolation	no	yes (1500 VAC)
Outputs isolated	yes (1500 VAC)	yes (1500 VAC)
Switching capacity 120/230 AC DC	2 A 60 W (2A)	2 A 60 W (2A)
Load current,nominal value	2 A AC-1 1 A AC-3	2 A AC-1 1 A AC-3
Minimum values	12 VDC 10 mA	12 VDC 10 mA
Total current for 8 outputs	16 A	16 A
Short circuit shutdown	no	no
Limit of the inductive shutdown voltage	Varistor	Varistor
Maximum power consumption	0.2 A	6VA
Maximum power dissipation	5 W	5 W
Order number : FPR 331 2101	R1012	R0016/R0014
Weight (kg)	0.25	0.43